arXiv:1607.02831v1 [physics.flu-dyn] 11 Jul 2016

Flow of Power-Law Liquids in a Hele-Shaw Cell Driven by Non-Uniform Electroosmotic Slip in the Case of Strong Depletion

E. Boyko, M. Bercovici† and A. D. Gat‡

Faculty of Mechanical Engineering, Technion - Israel Institute of Technology, Haifa 3200003, Israel

(Received 2016)

We analyze flow of non-Newtonian fluids in a Hele-Shaw cell, subjected to spatially non-uniform electroosmotic slip. Motivated by their potential use for increasing the characteristic pressure fields, we specifically focus on power-law fluids with wall depletion properties. We derive a p-Poisson equation governing the pressure field, as well as a set of linearized equations representing its asymptotic approximation for weakly non-Newtonian behavior. To investigate the effect of non-Newtonian properties on the resulting fluidic pressure and velocity, we consider several configurations in one- and two-dimensions, and calculate both exact and approximate solutions. We show that the asymptotic approximation is in good agreement with exact solutions even for fluids with significant non-Newtonian behavior, allowing its use in the analysis and design of microfluidic systems involving electro-kinetic transport of such fluids.

1. Introduction

Electroosmotic flow (EOF) is the bulk fluid motion due to an electric body force acting on the net charge in the diffuse part of an electrical double layer (EDL) near a solid surface. EOF actuation is not limited to Newtonian fluids and can be found in various microfluidic applications involving the use of complex fluids, such as ones containing proteins, colloidal suspensions, nucleic acids, or other polymeric solutions characterized by non-Newtonian behavior (Zhao & Yang 2013*a*). In addition, recent studies have shown that the pressure field induced due to EOF is increased by two to three orders of magnitude when a non-Newtonian polymer solution is used instead of a Newtonian fluid (Berli 2010). Such increase in the pressure field induced by EOF may be desirable for various applications such as more effective EOF-based pumps (Berli 2010) and deformation of elastic structures (Rubin *et al.* 2016).

Non-Newtonian flow often include a depletion layer, which is a narrow region in the vicinity of the wall in which key components in the liquid (typically polymer chains) are rejected either due to the local isotropy of a Brownian motion or the electrostatic force. Within the depletion layer, the reduction in concentration of polymer segments significantly reduces the fluid viscosity, as compared to the bulk (Barnes 1995).

Previous studies on EOF with depletion layer include Olivares *et al.* (2009) who accounted for the effect of the depletion layer (Berli & Olivares 2008) on uniform EOF. The authors experimentally showed that in the case of strong depletion (where the fluid can be considered Newtonian in the vicinity of the wall), the electroosmotic velocity remains linear with applied electric field and may continue to be described by

† Email address for correspondence: mberco@technion.ac.il
‡ Email address for correspondence: amirgat@technion.ac.il

the Helmholtz-Smoluchowski slip velocity (Hunter 2000). Berli (2010) used a power-law model to examine EOF of polymer solutions in the presence of wall depletion, deriving an analytical expression for the maximal pressure difference in a capillary, and demonstrating good agreement with the experimental data of Paul (2008) for polyacrylic acid.

In many naturally occurring configurations, as well as in engineered applications, surfaces exhibit a non-uniform surface charge or zeta potential distribution. The effects of such non-uniform distribution on the EOF of Newtonian fluids have been studied extensively in various geometries. A number of previous studies have demonstrated analytically (Anderson & Idol 1985; Ajdari 1995, 1996, 2001; Stroock *et al.* 2000; Qian & Bau 2002; Erickson & Li 2002, 2003; Zhang *et al.* 2006) and experimentally (Stroock *et al.* 2000) that a periodic zeta potential leads to multi-directional or circular flow patterns, depending on whether the applied field is parallel or perpendicular to gradient of zeta potential. Recently, we have studied EOF in a Hele-Shaw configuration with non-uniform zeta potential distribution and demonstrated that leveraging this non-uniformity enables to generate desired flow patterns in confined regions, without physical walls (Boyko *et al.* 2015).

To date, only few studies examined EOF of non-Newtonian fluids with non-homogeneous zeta potential distributions. Recently, Ng & Qi (2014) and Qi & Ng (2015) studied analytically and numerically EOF of power-law fluids between undulating plates with a periodic surface charge distribution. Ng & Qi (2014) showed that for a polymeric solution exhibiting strong depletion near flat surfaces, the net flux resulting from a sinusoidal zeta potential distribution is independent of its amplitude. In the absence of a depletion layer, Qi & Ng (2015) demonstrated that increasing the amplitude of zeta potential modulation results in an increase in flux for a shear-thinning fluid and a decrease for a shear-thickening fluid. Ghosh & Chakraborty (2015) focused on EOF of viscoelastic fluids, and also examined the case of a periodic zeta potential distribution. Assuming a thin EDL and small Deborah number, Ghosh & Chakraborty (2015) derived a modified Helmholtz-Smoluchowski slip boundary for quasi-linear upper-convected Maxwell (UCM) fluids (Irgens 2014) in terms of an asymptotic series of Deborah number. The authors also showed that the net flux in the channel decreases for UCM fluids, as compared to the Newtonian ones.

The aim of this work is to analyze the flow and pressure field of a non-Newtonian power-law fluid within a Hele-Shaw cell, driven by non-uniform EOF in the case of strong depletion. In §2 we present the problem formulation and detail the key assumptions used in the derivation of the model. In §3 we derive a non-linear p-Poisson equation governing the pressure field, and present an asymptotic approximation for weakly non-Newtonian power-law fluids. In §4 we consider a one dimensional configuration and quantitatively estimate the asymptotic accuracy relative to the exact solution. In §5 we utilize the asymptotic approximation and examine several two dimensional configurations and characterize the effect of shear thinning and thickening on the velocity and pressure fields. We conclude with a discussion of the results in §6.

2. Problem formulation

We study the steady non-uniform EOF of a non-Newtonian fluid within the narrow gap between two parallel plates. Figure 1 presents a schematic illustration of the configuration and coordinate system. We hereafter denote dimensional variables by tildes, normalized variables without tildes and characteristic values by an asterisk superscript.

We employ a Cartesian coordinate system $(\tilde{x}, \tilde{y}, \tilde{z})$ whose $\tilde{x}$ and $\tilde{y}$ axes lie in the mid-

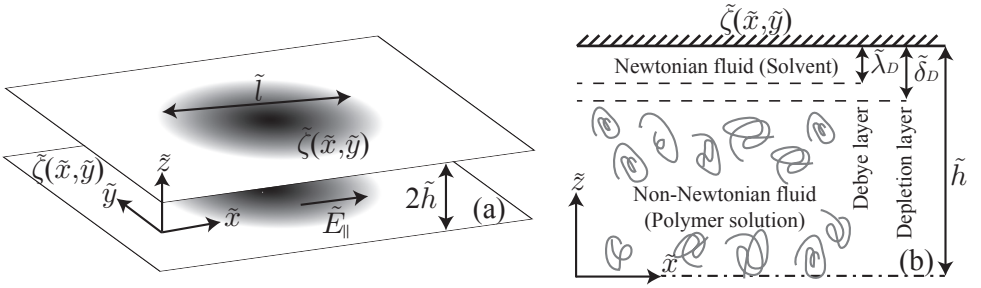

FIGURE 1. Schematic illustration of the examined configuration, showing the coordinate system and relevant physical parameters. (a) Two parallel plates contain a non-Newtonian fluid subjected to a uniform electric field $\tilde{\boldsymbol{E}}_{||}$. The plates are separated by a small gap $2\tilde{h}$ and are functionalized with arbitrary zeta potential distribution, $\tilde{\zeta}(\tilde{x},\tilde{y})$. (b) Cross section view showing the case of strong depletion considered in this study (dashed-dot line presents the symmetry line of the configuration). The bulk contains a non-Newtonian fluid (polymer solution), while the depletion layer of thickness $\tilde{\delta}_D$ contains a Newtonian fluid (solvent). We assume the Debye length $\tilde{\lambda}_D$ is smaller than $\tilde{\delta}_D$.

plane of the channel and $\tilde{z}$ is perpendicular thereto. The lower and upper plates have arbitrary zeta potential distribution defined as $\tilde{\zeta}(\tilde{x},\tilde{y})$, which vary over a characteristic length scale $\tilde{l}$ in the $\tilde{x}-\tilde{y}$ plane, and the gap between the plates is $2\tilde{h}$. Hereafter, we adopt the $\|$ and $\perp$ subscripts to denote parallel and perpendicular directions to the $\tilde{x}-\tilde{y}$ plane, respectively. The fluid constant density is $\tilde{\rho}$, fluid velocity is $\tilde{\boldsymbol{u}} = \left(\tilde{\boldsymbol{u}}_{\|}, \tilde{\boldsymbol{u}}_{\perp}\right) = (\tilde{u},\tilde{v},\tilde{w})$ and fluid pressure is $\tilde{p}$. The uniform electric field, applied parallel to the plates, is $\tilde{\boldsymbol{E}}_{||}$.

Modelling EOF of non-Newtonian fluids may be achieved by utilizing several constitutive models, which can be primarily divided into inelastic power-law models (Das & Chakraborty 2006; Zhao *et al.* 2008; Berli & Olivares 2008; Olivares *et al.* 2009; Tang *et al.* 2009; Berli 2010; Zhao & Yang 2010; Vasu & De 2010; Zhao & Yang 2011; Babaie *et al.* 2011; Vakili *et al.* 2012; Zhao & Yang 2013*b*) and viscoelastic models, the most common being are the PTT (Phan-Thien-Tanner) model and FENE-P (finitely extensible nonlinear elastic Peterlins approximation) model (Afonso *et al.* 2009; Dhinakaran *et al.* 2010; Afonso *et al.* 2011; Sousa *et al.* 2011; Afonso *et al.* 2013). Of all models, the commonly used power-law model shows both experimental relevance for the EOF problem (Olivares *et al.* 2009; Berli 2010) and at the same time is sufficiently simple to allow analytical treatment of non-uniform EOF. Therefore, throughout this work we consider the following constitutive model for the viscosity $\tilde{\eta}$ (Bird *et al.* 1987)

$$\tilde{\eta}(\dot{\gamma}) = \tilde{\mu}_{eff}\dot{\gamma}^{n-1}, \tag{2.1}$$

where n is dimensionless power-law index, $\tilde{\mu}_{eff}$ is the effective constant viscosity with units $\mathrm{Pa\,s^n}$ and $\dot{\gamma}$ is the shear rate defined as and $\dot{\gamma}$ is the shear rate defined as $\dot{\gamma} = \sqrt{2\tilde{\boldsymbol{D}} : \tilde{\boldsymbol{D}}}$, where $\tilde{\boldsymbol{D}}$ is the rate of deformation tensor given by $\tilde{\boldsymbol{D}} = (\tilde{\boldsymbol{\nabla}}\tilde{\boldsymbol{u}} + \tilde{\boldsymbol{\nabla}}\tilde{\boldsymbol{u}}^{\dagger})/2$. The power-law index lies in range $0 < n < 1$ for shear-thinning fluids, and $n > 1$ for shear-thickening fluids. The case $n = 1$ represents the Newtonian fluid, in which $\tilde{\mu}_{eff} = \tilde{\eta}_N$, where η_N is the viscosity of the Newtonian fluid. We note that while most polymer solutions are shear-thinning (Bird *et al.* 1987), our analysis holds for both shear-thinning and shear thickening fluids.

We here consider a configuration having a thin EDL, $\tilde{\lambda}_D/\tilde{h} \ll 1$ where $\tilde{\lambda}_D$ is Debye length. We also assume the presence of depletion layer of characteristic length $\tilde{\delta}_D$, which is larger than the Debye length (but of the same order of magnitude, see figure (1b)), $\tilde{\lambda}_D/\tilde{h} \ll \tilde{\lambda}_D/\tilde{\delta}_D < 1$, such that the fluid can be considered Newtonian within the EDL.

Furthermore, we restrict our analysis to shallow flow and negligible inertia

$$\epsilon = \frac{\tilde{h}}{\tilde{l}} \ll 1, \quad \epsilon Re \ll 1, \tag{2.2}$$

where the relevant reduced Reynolds number, ϵRe, is defined in (2.10).

In addition, we assume that surface conduction is negligible, thus considering a small Dukhin number (Lyklema 1995),

$$Du = \frac{\tilde{\sigma}_s}{\tilde{\sigma}_b \tilde{h}} \ll 1, \tag{2.3}$$

where $\tilde{\sigma}_s/\tilde{\sigma}_b$ is the ratio of surface to bulk conductivities (see Lyklema 1995). As noted by **?** and Khair & Squires (2008*b*), this ratio is a length scale which determines the spatial variations in electric field due to non-uniformity in surface conduction. High Dukhin numbers would result in significant spatial variations in electric field, as well as in variations in concentration which may lead to chemiosmotic flow corrections (Derjaguin *et al.* 1961, 1993; Prieve *et al.* 1984; Khair & Squires 2008*a*). Under our assumption of $Du \ll 1$, the electric field and the bulk concentration can thus be considered uniform throughout the domain.

Based on the assumptions mentioned above, the relevant governing equations and boundary conditions are the continuity equation

$$\tilde{\boldsymbol{\nabla}} \cdot \tilde{\boldsymbol{u}} = 0, \tag{2.4}$$

the momentum equation

$$\tilde{\rho} \tilde{\boldsymbol{u}} \cdot \tilde{\boldsymbol{\nabla}} \tilde{\boldsymbol{u}} = -\tilde{\boldsymbol{\nabla}} \tilde{p} + \tilde{\boldsymbol{\nabla}} \cdot \tilde{\boldsymbol{\tau}}, \tag{2.5}$$

the constitutive equation for the stress tensor $\tilde{\boldsymbol{\tau}}$ of power-law fluid

$$\tilde{\boldsymbol{\tau}} = 2\tilde{\mu}_{eff} \dot{\gamma}^{n-1} \tilde{\boldsymbol{D}}, \tag{2.6}$$

and the appropriate Helmholtz-Smoluchowski slip boundary conditions (Hunter 2000) as well as the no-penetration conditions on the solid walls

$$\tilde{\boldsymbol{u}}_{\parallel}|_{\tilde{z}=\pm\tilde{h}} = -\frac{\tilde{\varepsilon}\tilde{\zeta}(\tilde{x},\tilde{y})\tilde{\boldsymbol{E}}_{\parallel}}{\tilde{\eta}_N}, \quad \tilde{\boldsymbol{u}}_{\perp}|_{\tilde{z}=\pm\tilde{h}} = 0, \tag{2.7}$$

where $\tilde{\varepsilon}$ is the fluid permittivity and $\tilde{\eta}_N$ is the viscosity of Newtonian fluid in the depletion layer.

The characteristic value of the velocity in the $\tilde{x}-\tilde{y}$ plane, $\tilde{u}^*$, is given by the Helmholtz-Smoluchowski slip condition as $\tilde{u}^* = -\tilde{\varepsilon}\tilde{\zeta}^*\tilde{E}^*/\tilde{\eta}_N$, where $\tilde{\zeta}^*$ is characteristic value of zeta potential and $\tilde{E}^*$ is characteristic externally applied electric field. The characteristic velocity in the $\hat{\boldsymbol{z}}$ direction, $\tilde{w}^*$, and the characteristic pressure, $\tilde{p}^*$, remain to be determined from scaling arguments. Scaling by the characteristic dimensions, we define the normalized coordinates, $(x,y,z) = (\tilde{x}/\tilde{l}, \tilde{y}/\tilde{l}, \tilde{z}/\tilde{h})$, normalized velocity, $(u,v,w) = (\tilde{u}/\tilde{u}^*, \tilde{v}/\tilde{u}^*, \tilde{w}/\tilde{w}^*)$, normalized pressure, $p = \tilde{p}/\tilde{p}^*$, normalized zeta potential distribution, $\zeta = \tilde{\zeta}/\tilde{\zeta}^*$ and normalized applied electric field, $\boldsymbol{E}_{\parallel} = \tilde{\boldsymbol{E}}_{\parallel}/\tilde{E}^*$.

Substituting the normalized parameters into (2.4), order of magnitude analysis yields

$$\frac{\tilde{w}^*}{\tilde{u}^*} \sim \frac{\tilde{h}}{\tilde{l}} = \epsilon. \tag{2.8}$$

Substituting (2.8) into (2.5) and performing order of magnitude analysis, we obtain the

characteristic pressure

$$\tilde{p}^* = \left(\frac{2n+1}{n}\right)^n \frac{\tilde{u}^{*n}\tilde{\mu}_{eff}}{\epsilon^{n+1}\tilde{l}^n} = \left(\frac{2n+1}{n}\right)^n \frac{\tilde{\mu}_{eff}}{\epsilon^{n+1}\tilde{l}^n}\left(-\frac{\tilde{\varepsilon}\tilde{\zeta}^*\tilde{E}^*}{\tilde{\eta}_N}\right)^n, \tag{2.9}$$

as well as the condition for negligible inertia expressed in terms of relevant physical quantities,

$$\epsilon Re = \epsilon\frac{\tilde{\rho}\tilde{u}^{*2-n}\tilde{h}^n}{\tilde{\mu}_{eff}} = \epsilon\frac{\tilde{\rho}\tilde{h}^n}{\tilde{\mu}_{eff}}\left(-\frac{\tilde{\varepsilon}\tilde{\zeta}^*\tilde{E}^*}{\tilde{\eta}_N}\right)^{2-n} \ll 1. \tag{2.10}$$

The expression (2.9) is similar, up to constant factor, to the maximum pressure that can be achieved by electroosmotic pumps, for the case of strong depletion near the wall (Berli 2010). We also note that the characteristic pressure depends on the ratio of bulk to depletion layer viscosities, and does not increase linearly with the applied electric field and in the case of a Newtonian fluid (Boyko *et al.* 2015). Using (2.8) the dimensional shear rate, $\dot{\gamma}$ can be estimated as

$$\dot{\gamma} = \frac{\tilde{u}^*}{\epsilon\tilde{l}}\left(\left|\frac{\partial \boldsymbol{u}_{||}}{\partial z}\right| + O(\epsilon^2)\right), \tag{2.11}$$

where $\left|\partial \boldsymbol{u}_{||}/\partial z\right| = \sqrt{(\partial u/\partial z)^2 + (\partial v/\partial z)^2}$.

Substituting (2.8)-(2.11) into (2.4)-(2.7) and applying the lubrication approximation results in the following set of normalized equations and boundary conditions,

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0, \tag{2.12a}$$

$$\boldsymbol{\nabla}_{\parallel} p = \left(\frac{n}{2n+1}\right)^n \frac{\partial}{\partial z}\left(\left|\frac{\partial \boldsymbol{u}_{||}}{\partial z}\right|^{n-1}\frac{\partial \boldsymbol{u}_{||}}{\partial z}\right) + O(\epsilon Re, \epsilon^2), \tag{2.12b}$$

$$\frac{\partial p}{\partial z} = O(\epsilon^3 Re, \epsilon^2), \tag{2.12c}$$

$$\boldsymbol{u}_{\parallel}|_{z=\pm 1} = \zeta(x,y)\boldsymbol{E}_{\parallel}, \quad \boldsymbol{u}_{\perp}|_{z=\pm 1} = 0. \tag{2.12d}$$

where $\boldsymbol{\nabla}_{\parallel} = (\partial/\partial x, \partial/\partial y)$ is the two dimensional gradient.

3. The Governing Equation and its Asymptotic Approximation for Power-Law Fluids

Integrating (2.12*b*) with respect to z and applying the symmetry condition at the mid-plane yields,

$$\boldsymbol{\nabla}_{\parallel} pz = \left(\frac{n}{2n+1}\right)^n \left|\frac{\partial \boldsymbol{u}_{||}}{\partial z}\right|^{n-1}\frac{\partial \boldsymbol{u}_{||}}{\partial z} \tag{3.1}$$

or alternatively,

$$\frac{\partial \boldsymbol{u}_{||}}{\partial z} = \frac{2n+1}{n}\left|\boldsymbol{\nabla}_{\parallel} p\right|^{\frac{1}{n}-1}\boldsymbol{\nabla}_{\parallel} p\,|z|^{\frac{1}{n}}. \tag{3.2}$$

Integrating (3.2) again with respect to z and applying the slip boundary conditions (2.12*d*) we obtain

$$\boldsymbol{u}_{||} = \left(\frac{2n+1}{n+1}\right)\left|\boldsymbol{\nabla}_{\parallel} p\right|^{\frac{1}{n}-1}\boldsymbol{\nabla}_{\parallel} p\left(|z|^{1+\frac{1}{n}} - 1\right) + \zeta(x,y)\boldsymbol{E}_{\parallel}. \tag{3.3}$$

Utilizing the continuity equation (2.12a) and the in-plane velocity (3.3), we obtain an explicit expression for the perpendicular velocity

$$\boldsymbol{u}_{\perp} = \left(\frac{n}{n+1}\right) z \left(1 - |z|^{1+\frac{1}{n}}\right) \left[\boldsymbol{E}_{\parallel} \cdot \boldsymbol{\nabla}_{\parallel} \zeta\right] \hat{\boldsymbol{z}}. \tag{3.4}$$

Defining the mean in-plane velocity, as $\langle \boldsymbol{u}_{\parallel} \rangle = (1/2) \int_{z=-1}^{z=1} \boldsymbol{u}_{\parallel} dz = \int_{z=0}^{z=1} \boldsymbol{u}_{\parallel} dz$, and making use of (2.12a), (2.12d) and (3.3) yields the depth-averaged equations

$$\boldsymbol{\nabla}_{\parallel} \cdot \langle \boldsymbol{u}_{\parallel} \rangle = 0, \tag{3.5}$$

and

$$\langle \boldsymbol{u}_{\parallel} \rangle = - \left|\boldsymbol{\nabla}_{\parallel} p\right|^{\frac{1}{n}-1} \boldsymbol{\nabla}_{\parallel} p + \zeta(x,y) \boldsymbol{E}_{\parallel}. \tag{3.6}$$

Applying the two dimensional divergence to (3.6), and using (3.5), we obtain an equation in terms of the pressure only,

$$\boldsymbol{\nabla}_{\parallel} \cdot \left(\left|\boldsymbol{\nabla}_{\parallel} p\right|^{\frac{1}{n}-1} \boldsymbol{\nabla}_{\parallel} p \right) = \boldsymbol{E}_{\parallel} \cdot \boldsymbol{\nabla}_{\parallel} \zeta. \tag{3.7}$$

The p-Poisson equation (3.7) describes the pressure in a Hele-Shaw cell containing a power-law fluid subjected to non-uniform EOF, and extends the homogenous p-Laplacian equation derived by Aronsson & Janfalk (1992) for the case of no slip boundary conditions. The source term in (3.7) depends on gradients of zeta potential which are parallel to the applied electric field, thus allowing an associated gauge freedom in the choice of the zeta potential without affecting the resulting pressure. We note that one may eliminate the pressure from (3.6) by applying the normal component of the curl operator leading to the governing equation in terms of the depth-averaged velocity field alone.

For the case of non-Newtonian power-law fluid that exhibits a weak shear-thinning or shear-thickening behavior, we define the auxiliary small parameter δ,

$$n = 1 - \delta, \tag{3.8}$$

and the asymptotic expansions

$$p = p^{(0)} + \delta p^{(1)} + O(\delta^2), \tag{3.9}$$

and

$$\langle \boldsymbol{u}_{\parallel} \rangle = \langle \boldsymbol{u}_{\parallel} \rangle^{(0)} + \delta \langle \boldsymbol{u}_{\parallel} \rangle^{(1)} + O(\delta^2), \tag{3.10}$$

where $|\delta| \ll 1$ is a small parameter which is positive for shear-thinning and negative for shear-thickening behaviors, respectively. Substituting (3.8) and (3.9) into the viscous term in (3.7) and using the expansion $1/n \sim 1 + \delta + O(\delta^2)$, yields

$$\left|\boldsymbol{\nabla}_{\parallel} p\right|^{\frac{1}{n}-1} = 1 + \delta \ln \left|\boldsymbol{\nabla}_{\parallel} p^{(0)}\right| + O(\delta^2). \tag{3.11}$$

Utilizing (3.8)-(3.11), the leading order and first order correction of (3.6) are

$$O(1): \quad \langle \boldsymbol{u}_{\parallel} \rangle^{(0)} = -\boldsymbol{\nabla}_{\parallel} p^{(0)} + \zeta \boldsymbol{E}_{\parallel}, \tag{3.12}$$

and

$$O(\delta): \quad \langle \boldsymbol{u}_{\parallel} \rangle^{(1)} = -\boldsymbol{\nabla}_{\parallel} p^{(1)} - \ln \left|\boldsymbol{\nabla}_{\parallel} p^{(0)}\right| \boldsymbol{\nabla}_{\parallel} p^{(0)}, \tag{3.13}$$

respectively. Applying the two dimensional divergence to (3.12) and (3.13), and using (3.5), we obtain equations for the leading order and first order correction of the pressure

$$O(1): \quad \nabla_{\parallel}^2 p^{(0)} = \boldsymbol{E}_{\parallel} \cdot \boldsymbol{\nabla}_{\parallel} \zeta, \tag{3.14}$$

and

$$O(\delta): \quad \nabla_{\parallel}^2 p^{(1)} = -\boldsymbol{\nabla}_{\parallel} \cdot \left(\ln \left| \boldsymbol{\nabla}_{\parallel} p^{(0)} \right| \boldsymbol{\nabla}_{\parallel} p^{(0)} \right), \tag{3.15}$$

respectively. Both (3.14) and (3.15) are Poisson equations where the inhomogeneous part of (3.14) is related to the non-uniform zeta potential distribution (see Boyko *et al.* 2015), and the inhomogeneous part of (3.15) emanates from the non-Newtonian response of the fluid to the leading order pressure gradients.

4. Results - 1D configurations

We here present a closed form exact solution of (3.7) for arbitrary one dimensional configurations, as well as their asymptotic approximation. We then use a particular case of an abrupt change in zeta potential to evaluate the accuracy of the asymptotic approximation.

4.1. *Exact Solutions of the p-Poisson Equation for 1D configurations*

Consider the case where the zeta potential distribution is a function of x only, $\zeta = \zeta(x)$, and the electric field is directed along the $\hat{\boldsymbol{x}}$ axis, $\boldsymbol{E}_{\parallel} = E\hat{\boldsymbol{x}}$. For such configurations, the problem becomes one dimensional, and (3.3) and (3.7) take the form

$$q = -\left|\frac{dp}{dx}\right|^{\frac{1}{n}-1} \frac{dp}{dx} + \zeta(x)E, \tag{4.1}$$

and

$$\frac{d}{dx}\left(\left|\frac{dp}{dx}\right|^{\frac{1}{n}-1} \frac{dp}{dx}\right) = E\frac{d\zeta(x)}{dx}, \tag{4.2}$$

where q is a volume flux. We prescribe gauge pressure at the inlet and outlet

$$p|_{x=0} = p|_{x=1} = 0, \tag{4.3}$$

or alternatively impose inlet pressure $p|_{x=0} = 0$ and a desired volume flux q. Solving (4.2), we obtain

$$p(x) = \int_0^x |\zeta(x)E - q|^{n-1} (\zeta(x)E - q)\, dx, \tag{4.4}$$

where q may be calculated (in the case of (4.3)) from the equality

$$\int_0^1 |\zeta(x)E - q|^{n-1} (\zeta(x)E - q)\, dx = 0. \tag{4.5}$$

We consider a case where the zeta potential acquires a constant positive value, ζ_0, before the discontinuity at x_0 and vanishes afterwards,

$$\zeta(x) = \zeta_0 H(x_0 - x), \tag{4.6}$$

where H is the Heaviside function. Substituting (4.6) into (4.5) yields

$$\int_0^{x_0} |\zeta_0 E - q|^{n-1} (\zeta_0 E - q)\, dx - \int_{x_0}^1 |q|^{n-1} q dx = 0, \tag{4.7}$$

Assuming that E is positive and $E\zeta_0 \geqslant q$ (since the value $E\zeta_0$ is the maximal volume flux that can be achieved, when entire channel has a zeta potential ζ_0), from (4.7) we obtain

$$\frac{q}{E\zeta_0} = \frac{1}{1 + ((1 - x_0)/x_0)^{1/n}}. \tag{4.8}$$

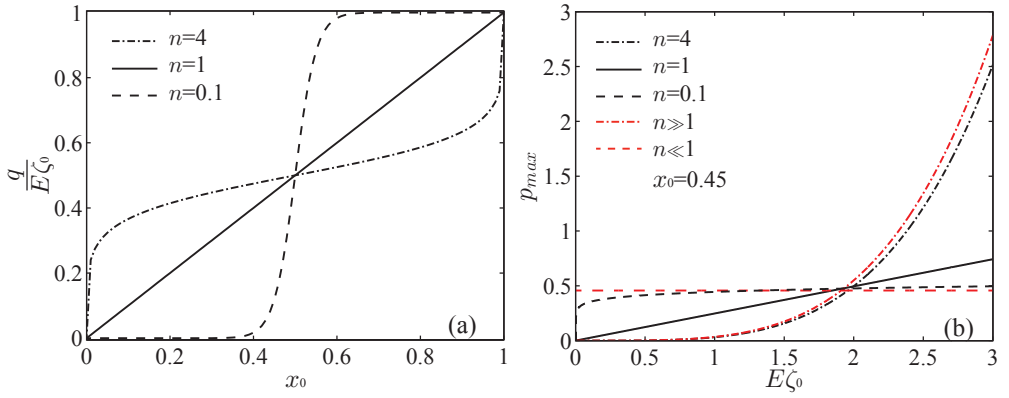

FIGURE 2. The volume flux and maximal pressure in the case of a step zeta potential distribution for one dimensional configurations. (a) Comparison of flux to slip velocity ratio, $q/E\zeta_0$, as function of the step location x_0 for strong shear-thickening (dashed-dot line), strong shear-thinning (dashed line) and Newtonian behavior. (b) Maximal pressure obtained from (4.10) as function of $E\zeta_0$ for $x_0 = 0.45$ and $n = 0.1, 1, 4$. Black dashed line describes a strong shear-thinning behavior which tends to constant value given by (4.11) and shown as red dashed line. Black dashed-dot line corresponds to the case of strong shear-thickening, and coincides with asymptotic behavior given by (4.12) (red dashed-dot line). The black solid line presents a Newtonian case.

Substituting (4.8) into (4.4) results in

$$p(x) = \begin{cases} -q^n (x-1) & x > x_0 \\ (\zeta_0 E - q)^n x & x \leqslant x_0. \end{cases} \tag{4.9}$$

Figure (2a) presents the volume flux to slip velocity ratio, $q/E\zeta_0$, as a function of x_0 (the position of the zeta potential discontinuity) for a strongly shear-thinning fluid $n = 0.1$ (dashed line), a strongly shear-thickening fluid $n = 4$ (dashed-dotted line), and a Newtonian fluid (solid line). For a Newtonian fluid and constant $E\zeta_0$, the flux q increases linearly with x_0, as expected. In the case of strong shear-thinning, the flux to slip velocity ratio, $q/E\zeta_0$, is approximately zero when the abrupt change in zeta potential occurs before the middle of the channel ($x_0 < 0.5$), while $q/E\zeta_0$ is approximately 1 in case the discontinuity is positioned after the middle of the channel ($x_0 > 0.5$). In contrast, in the case of strong shear-thickening, $q/E\zeta_0$ is weakly dependent on the location of the discontinuity (except near the boundaries).

It is also interesting to investigate the effect of the parameter n on resulting maximal pressure in the channel, given by

$$p_{max} \triangleq p^{ex}_{max} = (E\zeta_0)^n \frac{1 - x_0}{\left(1 + ((1-x_0)/x_0)^{1/n}\right)^n}. \tag{4.10}$$

When $n \ll 1$, we have

$$p_{max} \sim \begin{cases} 1 - x_0 & x_0 > 0.5 \\ x_0 & x_0 < 0.5 \end{cases}, \tag{4.11}$$

independently of value $E\zeta_0$, whereas for $n \gg 1$, we obtain

$$p_{max} \sim (1 - x_0) \left(\frac{1}{2} E\zeta_0\right)^n. \tag{4.12}$$

Figure (2b) presents a variation of maximal pressure as function of $E\zeta_0$ for a specific

case of $x_0 = 0.45$. As expected, for a Newtonian fluid ($n = 1$) we obtain a linear behavior (black solid line). For small values of n, the maximal pressure (black dashed lines) rapidly approaches a constant value given by (4.11), which is solely determined by the location of discontinuity x_0 (red dashed line). On the other hand, for large values of n the maximal pressure (black dashed-dot lines) approaches the asymptotic limit (4.12) (red dashed-dot line).We note that for sufficiently small values of $E\zeta_0$, corresponding to shear rate less than one, where the viscosity of shear-thinning fluid exceeds the viscosity of the shear-thickening fluid, resulting in larger maximal pressure of shear-thinning fluid in this region.

4.2. *Asymptotic approximation for 1D configurations*

The leading and first order asymptotic approximations for one dimensional configurations are

$$O(1): \quad \frac{d^2p^{(0)}}{dx^2} = E\frac{d\zeta}{dx}, \tag{4.13a}$$

and

$$O(\delta): \quad \frac{d^2p^{(1)}}{dx^2} = -\frac{d}{dx}\left(\ln\left|\frac{dp^{(0)}}{dx}\right|\frac{dp^{(0)}}{dx}\right). \tag{4.13b}$$

(4.13a) and (4.13b) are readily solved, to attain

$$p^{(0)}(x) = \int_0^x E\zeta(x)dx - x\int_0^1 E\zeta(x)dx. \tag{4.14a}$$

and

$$p^{(1)}(x) = -\int_0^x \ln\left|\frac{dp^{(0)}}{dx}\right|\frac{dp^{(0)}}{dx}dx + x\int_0^1 \ln\left|\frac{dp^{(0)}}{dx}\right|\frac{dp^{(0)}}{dx}dx. \tag{4.14b}$$

We now derive the asymptotic solution corresponding to a step function in zeta potential, (4.6), in order to compare the exact and asymptotic results and evaluate the accuracy of the asymptotic solution. We define $x_0 = 0.5$. and substitute (4.6) into (4.15), yielding

$$\frac{d^2p^{(0)}}{dx^2} = -2E\zeta_0\delta(1-2x), \tag{4.15}$$

and the corresponding solution of (4.15) is

$$p^{(0)}(x) = \frac{1}{2}E\zeta_0\left(x + (1-2x)\,H(2x-1)\right). \tag{4.16}$$

Substituting (4.16) into (4.14b) yield

$$\frac{d^2p^{(1)}}{dx^2} = 2E\zeta_0\ln\left(\frac{1}{2}E\zeta_0\right)\delta(1-2x). \tag{4.17}$$

Solving (4.17) before and after the discontinuity, following the same procedure as we illustrated above, and requiring the continuity of the pressure and of the flux at $x_0 = 0.5$, leads to first order correction for the pressure distribution

$$p^{(1)}(x) = -\frac{1}{2}E\zeta_0\ln\left(\frac{1}{2}E\zeta_0\right)\left(x + (1-2x)\,H(2x-1)\right). \tag{4.18}$$

Combining (4.16) and (4.14b), and substituting $x = x_0 = 0.5$ yield a maximal pressure as a function of $E\zeta_0$ and δ

$$p^{as}_{max} \triangleq \frac{1}{4}E\zeta_0\left(1 - \delta\ln\left(\frac{1}{2}E\zeta_0\right)\right). \tag{4.19}$$

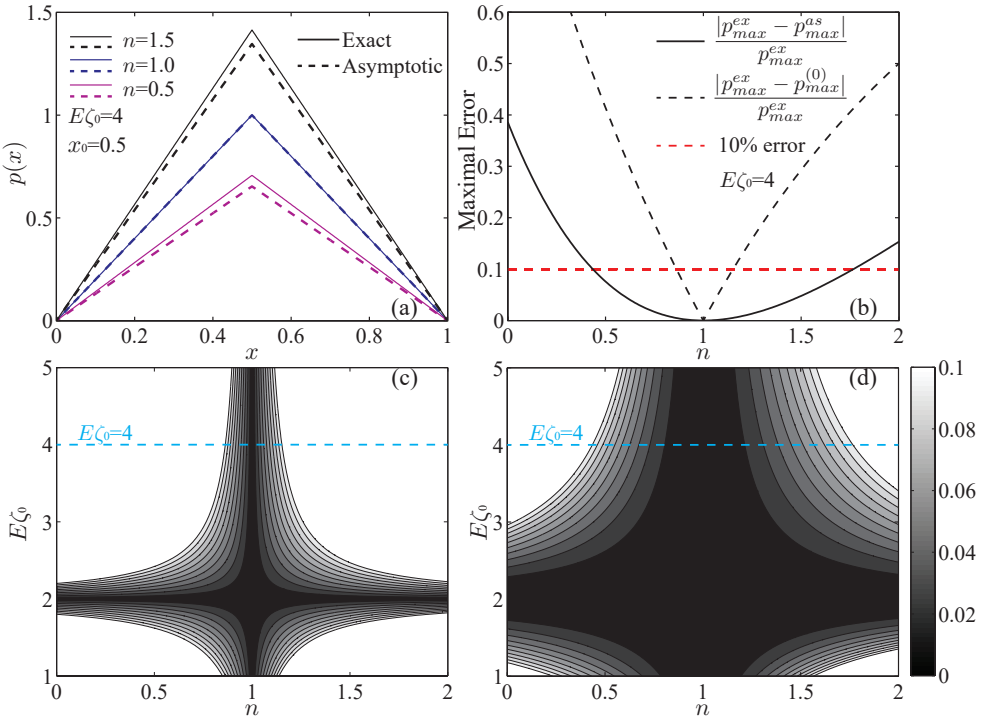

FIGURE 3. Comparison between exact solution and asymptotic approximations in the case of a step zeta potential distribution in one dimension. (a) The resulting pressure distribution calculated from exact (solid lines) and asymptotic (dashed lines) solutions for $n = 0.5, 1, 1.5$, $x_0 = 0.5$ and $E\zeta_0 = 4$. (b) The error in maximal pressure between exact and asymptotic solutions as a function of n, for the case of $x_0 = 0.5$ and $E\zeta_0 = 4$. Black dashed line given by (4.20a) corresponds to the Newtonian approximation, while black solid line corresponds to the first order correction (4.20b). Red dashed line represents a 10 % error. (c,d) Colormaps of the maximal error as function of the parameter n and slip velocity $E\zeta_0$, for the cases of a Newtonian approximation and a first order asymptotic approximation, respectively. The cyan dashed line shown in (c) and (d) corresponds to $E\zeta_0 = 4$, shown in (b). As expected, range of values of n for which error is less than 10 % is significantly increased when the first order non-Newtonian correction included.

Figure (3a) presents the pressure distribution obtained from exact (solid lines) and asymptotic (dashed lines) solutions for $n = 0.5, 1, 1.5$, $x_0 = 0.5$ and $E\zeta_0 = 4$. Since (4.9) is an exact solution, we define the maximal error of the leading order and first order asymptotic solutions

$$e^{(0)} = \left| \frac{p^{ex}_{max} - p^{(0)}_{max}}{p^{ex}_{max}} \right|, \tag{4.20a}$$

and

$$e^{(0)+(1)} = \left| \frac{p^{ex}_{max} - p^{as}_{max}}{p^{ex}_{max}} \right|, \tag{4.20b}$$

respectively. Figure (3b) presents the maximal error between the exact solution of the p-Poisson equation and the asymptotic approximation for a range of n values, for the case of $x_0 = 0.5$ and $E\zeta_0 = 4$. The solid black line presents the error of the asymptotic solution which includes the first order correction, whereas the black dashed line shows the maximal error given by (4.20a) in the case of a Newtonian approximation (zeroth order

only). The red dashed line presents a 10 % error. Clearly, the range of values of n for which the error is less than 10 % is significantly increased when the first order correction is taken into account.

Figure (3c) and (3d) show colormaps of the maximal error as function of parameter n and slip velocity $E\zeta_0$, in the case Newtonian approximation and non-Newtonian correction, respectively. The cyan dashed line in figures (3c) and (3d) represents the value of $E\zeta_0 = 4$, which is presented in figure (3b). As can be inferred from the results of figure (3), the first order correction significantly reduces the error and also remains applicable for a wide range of n values. This range of asymptotic applicability reduces however as $E\zeta_0$ increases.

5. Results - 2D configurations

5.1. *Axi-symmetric pressure fields*

Assuming a uniform electric field along the $\hat{\boldsymbol{x}}$ axis, $\boldsymbol{E}_{\parallel} = E\hat{\boldsymbol{x}}$, we consider the case where the gradient of zeta potential in $\hat{\boldsymbol{x}}$ direction, $\partial\zeta/\partial x$, is function of a single argument $r = \sqrt{x^2 + y^2}$. Therefore, the resulting pressure also depends only on r and is obtained through

$$\frac{1}{r}\frac{d}{dr}\left(\left|\frac{dp}{dr}\right|^{\frac{1}{n}-1}\frac{dp}{dr}r\right) = E\frac{\partial\zeta}{\partial x}(r). \tag{5.1}$$

Equation (5.1) is subjected to a symmetry boundary condition

$$\frac{dp}{dr} = 0 \quad \text{at} \quad r = 0, \tag{5.2}$$

and the pressure is required to decay far from the actuation region,

$$p = 0 \quad \text{as} \quad r \to \infty. \tag{5.3}$$

Integrating (5.1) with respect to r, we obtain

$$\left|\frac{dp}{dr}\right|^{\frac{1}{n}-1}\frac{dp}{dr} = \frac{E}{r}\left(\int r\frac{\partial\zeta}{\partial x}(r)dr + A\right), \tag{5.4}$$

where A is a constant determined using (5.2)

$$A = -\lim_{r\to 0}\frac{1}{r}\int r\frac{\partial\zeta}{\partial x}(r)dr. \tag{5.5}$$

From (3.6) and (5.4), it follows that the resulting flow field in this case is two dimensional, and identical for Newtonian and non-Newtonian fluids independently of the parameter n.

Hereafter, we focus on configurations where $\zeta(r)$ is continuous at the origin, and thus $A = 0$. Integrating once again (5.4) and using (5.3), yields a closed form expression for the pressure

$$p(r) = E^n\int_{\infty}^{r}\frac{1}{r^n}\left|\int r\frac{\partial\zeta}{\partial x}(r)dr\right|^{n-1}\left(\int r\frac{\partial\zeta}{\partial x}(r)dr\right)dr. \tag{5.6}$$

For a Newtonian fluid, a Gaussian-like pressure

$$p = E\zeta_0\exp\left(-\frac{x^2+y^2}{\alpha^2}\right) = E\zeta_0\exp\left(-\frac{r^2}{\alpha^2}\right), \tag{5.7}$$

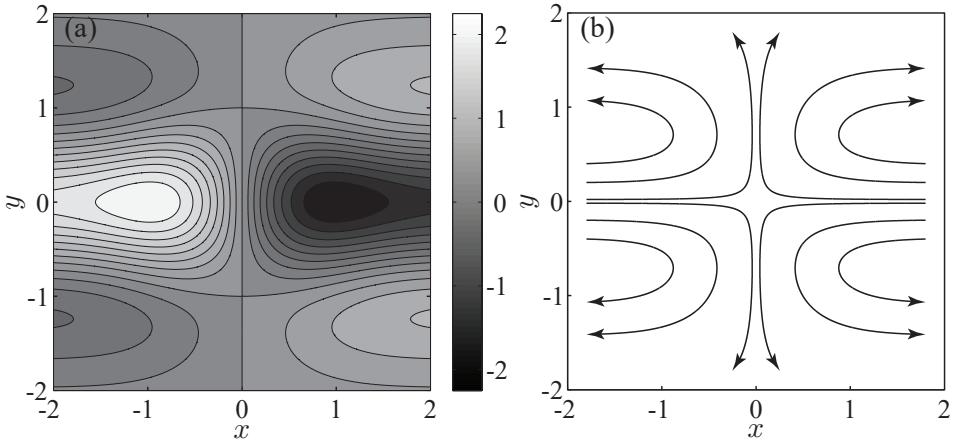

FIGURE 4. (a) Illustration of two dimensional zeta potential distribution with an axi-symmetric gradient in the $\hat{\boldsymbol{x}}$ direction, described by (5.8). (b) The resulting two dimensional flow field, due to zeta potential distribution shown in (a). The streamlines describe stagnation-like flow approaching the origin from the both side of $\hat{\boldsymbol{x}}$ axis. The flow field is identical for both Newtonian and non-Newtonian fluids as given by (5.11). All calculations were performed using $E = 3$ and $\zeta_0 = \alpha = 1$.

Polymer solution	Background electrolyte (solvent)	n	$\tilde{\mu}_{eff}$ [Pa s^n]
Polyacrylic acid (PAA), 8.33 mM, 42 kD, pH=8.2	10 mM Tris, 5 mM acetic acid	0.38	0.38
Carboxymethyl cellulose (CMC), 1 % w/v, pH=7	15 mM phosphoric acid	0.51	1.75

TABLE 1. Rheological parameters of polymer solutions at 25 ^{0}C. The background aqueous solution has viscosity of η_N=1 mPa s. PAA parameters are adapted from Paul (2008) and Berli (2010). CMC experimental data is taken from Olivares *et al.* (2009).

where α and ζ_0 are positive constants, may be obtained using the following zeta distribution

$$\zeta(x,y) = -\frac{\zeta_0}{\alpha^4}\left(2x\alpha + \sqrt{\pi}\left(-2y^2+\alpha^2\right)\exp\left(\frac{x^2}{\alpha^2}\right)\mathrm{erf}\left(\frac{x}{\alpha}\right)\right)\exp\left(-\frac{x^2+y^2}{\alpha^2}\right), \quad (5.8)$$

which is shown in figure (4a). We note that in this case the limit (5.5) gives $A = 0$.

We here examine the effect of non-Newtonian behavior on the pressure distribution, resulting from the same zeta potential (5.8). Substituting (5.8) into (5.6) provides a closed form analytical solution for the pressure for a non-Newtonian fluid with arbitrary n

$$p(r) = n^{-\frac{1}{2}(n+1)}\left(\frac{\alpha}{2}\right)^{1-n}(E\zeta_0)^n\,\Gamma\left(\frac{n+1}{2};\frac{nr^2}{\alpha^2}\right), \quad (5.9)$$

where $\Gamma(a;x) = \int_x^\infty \exp(-t)\,t^{a-1}dt$ is the incomplete Gamma function (Abramowitz & Stegun 1964). The leading order of the asymptotic solution is simply given in (5.7), while

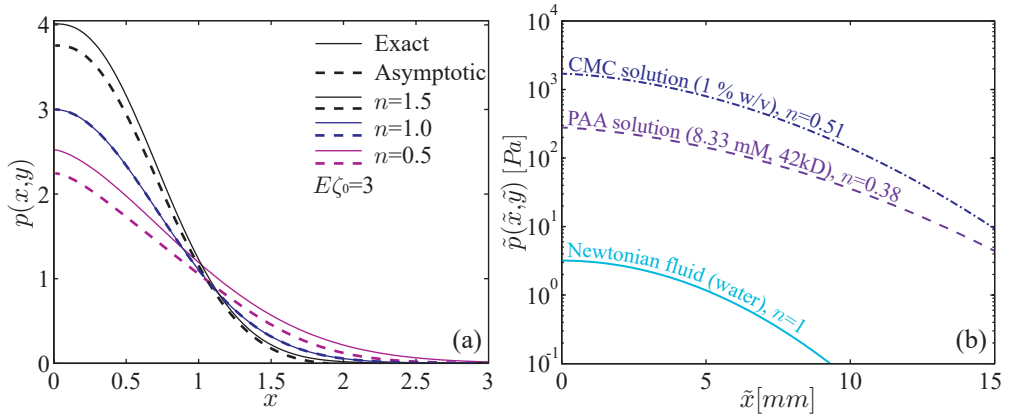

FIGURE 5. The use of non-Newtonian fluids allows to significantly increase the pressure resulting from non-uniform EOF by more than two order of magnitude. (a) Comparison of exact results (solid lines) and asymptotic approximations (dashed lines) for axi-symmetric (non-dimensional) pressure distributions, resulting from a two dimensional zeta potential, (5.8), for $n = 0.5, 1, 1.5$ and $E\zeta_0 = 3$. (b) Exact solutions in dimensional form showing significantly greater pressures for EOF driven flow of non-Newtonian fluids compared with Newtonian fluids. The different lines correspond to a Newtonian fluid (cyan solid line), 8.33 mM polyacrilic acid (PAA) (purple dashed line) and 1 % carboxymethyl cellulose (CMC) (blue dashed-dot line) solutions. The rheological power-law properties of PAA and CMC solutions are available in table 1. For a zeta potential difference of 75 mV, and an applied electric field of 100 $\mathrm{V\,cm^{-1}}$, a Newtonian fluid yields a maximum pressure of 3 Pa, whereas as PAA and CMC solutions yield pressures of 280 and 1700 Pa, respectively. All calculations were performed using $\tilde{l} = 5$ mm, $\tilde{h} = 50\,\mu m$, $\tilde{\zeta}^* = -25$ mV, $\tilde{E}^* = 100$ $\mathrm{V\,cm^{-1}}$, $\tilde{\varepsilon} = 7.08 \cdot 10^{-10}\,\mathrm{F\,m^{-1}}$, $E\zeta_0 = 3$ and $\alpha = 1$.

the first order is

$$p^{(1)}(r) = \frac{1}{2} E\zeta_0 \exp\left(-\frac{r^2}{\alpha^2}\right)\left(2 + \exp\left(\frac{r^2}{\alpha^2}\right)\mathrm{Ei}\left(-\frac{r^2}{\alpha^2}\right) - 2\ln\left(\frac{2E\zeta_0}{\alpha^2} r \exp\left(-\frac{r^2}{\alpha^2}\right)\right)\right), \tag{5.10}$$

where $\mathrm{Ei}(x) = -\int_{-x}^{\infty} \exp(-t)/t dt$ is the exponential integral function (Abramowitz & Stegun 1964). The corresponding flow field is readily obtained by differentiating (5.7) and using (5.8)

$$\langle \boldsymbol{u}_{\parallel} \rangle = \frac{E\zeta_0}{\alpha^2} \exp\left(-\frac{x^2+y^2}{\alpha^2}\right)\begin{pmatrix} \left(2\left(1-\frac{1}{\alpha}\right)x - \frac{\sqrt{\pi}}{\alpha^2}\left(-2y^2+\alpha^2\right)\exp\left(\frac{x^2}{\alpha^2}\right)\mathrm{erf}\left(\frac{x}{\alpha}\right)\right)\hat{\boldsymbol{x}} \\ 2y\hat{\boldsymbol{y}} \end{pmatrix}. \tag{5.11}$$

Figure (4b) presents several streamlines given by (5.11) for $E\zeta_0 = 3$. The streamlines describe an incoming fluid flowing along the both sides $\hat{\boldsymbol{x}}$ axis toward the origin, followed by outgoing flow initially turning in $\pm\hat{\boldsymbol{y}}$ directions and then curving back in the $\pm\hat{\boldsymbol{x}}$ directions to satisfy mass conservation. The resulting flow field (5.11) is independent of parameter n, due to a Neumann-type symmetry boundary condition (5.2) at the origin.

In figure (5a) we compare the resulting exact (solid lines) and asymptotic approximations (dashed lines) for the pressure distribution given by (5.9), (5.7) and (5.10), showing good agreement. Using (4.20a) and (4.20b), we also calculated the maximal errors in this case, concluding that in two-dimensions the accuracy of the asymptotic solution is approximately the same as in one dimension, yielding error below 10 % for values of n lying between 0.5 and 1.75.

Figure (5b) presents the resulting dimensional pressure distribution of (5.9), where we used three experimental values of n and $\tilde{\mu}_{eff}$ from table 1, corresponding to a Newtonian

fluid (cyan solid line), 8.33 mM polyacrilic acid (PAA) (purple dashed line) and 1 % carboxymethyl cellulose (CMC) (blue dashed-dot line) solutions. As can be observed, by leveraging non-Newtonian polymer solutions, the resulting pressure is increased by two to three orders of magnitude as compared to a Newtonian fluid.

5.2. *Asymptotic approximation for a circular spot with constant zeta potential*

We here study the effect of a spot with non-zero zeta potential on the resulting pressure and flow fields. This simple, yet fully two-dimensional case, is useful in providing physical insight on the effect of the power-law fluid on the flow field. In the following, we adopt the superscripts *in* and *out* to distinguish between physical quantities in each one of the two regions. The corresponding zeta potential distribution is given by

$$\zeta(r) = \zeta_0 H(r_0 - r). \tag{5.12}$$

Here H stands for the Heaviside function and r_0 is the radius of the spot. Without loss of generality, we assume that the uniform electric field is directed along the $\hat{\boldsymbol{x}}$ axis, $\boldsymbol{E}_{\parallel} = E\hat{\boldsymbol{x}}$. Substituting (5.12) into (3.14) and taking $p^{(0)} \to 0$ as $r \to \infty$, yield the leading order solution (Boyko *et al.* 2015)

$$p^{(0)}(r,\theta) = \begin{cases} \dfrac{3E\zeta_0 r_0^2}{2r}\cos(\theta) & r > r_0 \\ \dfrac{3}{2}E\zeta_0 r\cos(\theta) & r < r_0, \end{cases} \tag{5.13}$$

with corresponding flow field

$$\left\langle \boldsymbol{u}_{\parallel} \right\rangle^{(0)} = \begin{cases} \dfrac{1}{2}\dfrac{E\zeta_0 r_0^2}{r^2}\left(\cos(\theta)\hat{\boldsymbol{r}} + \sin(\theta)\hat{\boldsymbol{\theta}}\right) = \dfrac{1}{2}\dfrac{E\zeta_0 r_0^2}{(x^2+y^2)^2}\left(\left(x^2-y^2\right)\hat{\boldsymbol{x}} + 2xy\hat{\boldsymbol{y}}\right) & r > r_0 \\ \dfrac{1}{2}E\zeta_0\left(\cos(\theta)\hat{\boldsymbol{r}} - \sin(\theta)\hat{\boldsymbol{\theta}}\right) = \dfrac{1}{2}E\zeta_0\hat{\boldsymbol{x}} & r < r_0. \end{cases} \tag{5.14}$$

Next, we turn to solve the non-Newtonian (first order) contribution to the pressure. The source term in the first order equation (3.15) can be expressed using (5.13) as

$$-\boldsymbol{\nabla}_{\parallel}\cdot\left(\left(\ln\left|\boldsymbol{\nabla}_{\parallel}p^{(0)}\right|\right)\boldsymbol{\nabla}_{\parallel}p^{(0)}\right) = -\frac{E\zeta_0 r_0^2}{r^3}H\left(r-r_0\right)\cos(\theta). \tag{5.15}$$

Assuming the form $p^{(1)}(r,\theta) = f^{(1)}(r)\cos(\theta)$, we obtain an ordinary differential equation for $f^{(1)}(r)$

$$\frac{1}{r}\frac{d}{dr}\left(r\frac{df^{(1)}(r)}{dr}\right) - \frac{f^{(1)}(r)}{r^2} = -\frac{E\zeta_0 r_0^2}{r^3}H\left(r-r_0\right). \tag{5.16}$$

Solving (5.16) and requiring regularity, leads to

$$p^{(1)}(r,\theta) = \begin{cases} \left(\dfrac{a^{out}}{r} + \left(b^{out} - \dfrac{1}{4}E\zeta_0\right)r - \dfrac{1}{4}\dfrac{E\zeta_0 r_0^2}{r}\left(\ln\left(\dfrac{r_0}{r}\right)^2 - 1\right)\right)\cos(\theta) & r > r_0 \\ b^{in}r\cos(\theta) & r < r_0, \end{cases} \tag{5.17}$$

where a^{out}, b^{in} and b^{out} are coefficients to be determined from boundary conditions. Demanding vanishing pressure far from the disk, we find

$$b^{out} = \frac{1}{4}E\zeta_0. \tag{5.18}$$

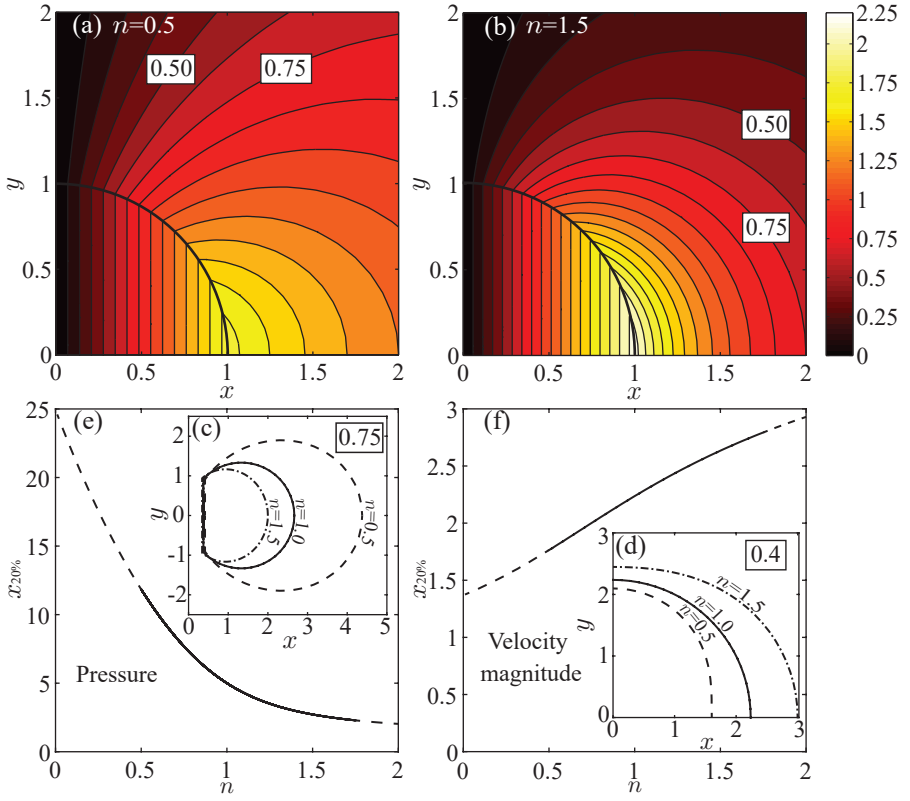

FIGURE 6. Two dimensional asymptotic approximations for the velocity and pressure fields of power-law fluids in the presence of a spot with constant zeta potential. (a) and (b) The pressure distribution (color-map) in first quadrant for $n = 0.5$ and $n = 1.5$ corresponding to shear-thinning and shear-thickening behavior, respectively, showing that the isobars of shear-thinning fluid are more spaced compared with those of a shear-thickening fluid. Isobars $p^{as} = 0.75$ presented in (c) and contours of velocity magnitude $\left|\langle \boldsymbol{u}_{\parallel} \rangle^{as}\right| = 0.4$ presented in (d) correspond to $n = 0.5$ (black dashed line), $n = 1$ (black solid line) and $n = 1.5$ (black dashed-dot line). Note that contours in (d) are more closely spaced than the contours in (c), thus indicating weakly dependence on n for the shear-thickening fluid. (e) and (f) The distance from the origin along the $\hat{\boldsymbol{x}}$ axis, where the pressure and the velocity magnitude drops to 20% of its maximum value, as function of n, respectively. Solid part of the line in (e) and (f) corresponds to the range of n lying between 0.5 and 1.75, where the asymptotic approximation is assumed to be valid, while the dashed line corresponds region that may involve significant errors. It follows from (c)-(f) that the pressure distribution strongly dependent on n for $n < 1$ and weakly dependent on n for $n > 1$ as compared to velocity magnitude showing only weak dependence n. All calculations were performed using $E\zeta_0 = 4$ and $r_0 = 1$.

The remaining coefficients a^{out} and b^{in} are determined by requiring a continuity of the pressure and flow field at $r = r_0$, leading to

$$a^{out} = -\frac{1}{2}E\zeta_0 r_0^2 \ln\left|\frac{1}{2}E\zeta_0\right|, \quad b^{in} = -\frac{1}{2}E\zeta_0\left(\ln\left|\frac{1}{2}E\zeta_0\right| - \frac{1}{2}\right). \tag{5.19}$$

Utilizing (3.13), (5.12) and (5.17)-(5.19) provides a closed-form expressions for the pressure and corresponding flow field at first order

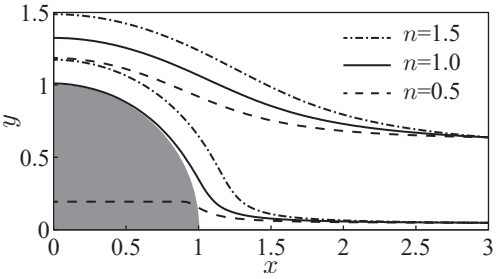

FIGURE 7. Effect of different non-Newtonian behavior on the resulting streamlines (in first quadrant) due to a positive zeta potential, $\zeta_0/2$, inside the spot of radius r_0 and negative zeta potential, $-\zeta_0/2$, outside the spot. In the Newtonian case (solid lines) the streamlines bend around the spot without entering it. The streamlines of the shear-thinning fluid ($n = 0.5$, dashed lines) are diverted toward the disk, while the streamlines of the shear-thickening fluid ($n = 1.5$, dashed-dot lines) divert away from it. All calculations were performed using $E\zeta_0 = 4$ and $r_0 = 1$.

$$p^{(1)}(r,\theta) = \begin{cases} \dfrac{1}{4}\dfrac{E\zeta_0 r_0^2}{r}\left(1 - 2\ln\left(\dfrac{1}{2}\dfrac{E\zeta_0 r_0}{r}\right)\right)\cos(\theta) & r > r_0 \\ \dfrac{1}{4}E\zeta_0\left(1 - 2\ln\left(\dfrac{1}{2}E\zeta_0\right)\right) r\cos(\theta) & r < r_0, \end{cases} \tag{5.20}$$

$$\left\langle \boldsymbol{u}_{\parallel} \right\rangle^{(1)} = \begin{cases} \dfrac{1}{4}\dfrac{E\zeta_0 r_0^2}{r^2}\left[\left(-1 + 2\ln\left(\dfrac{r_0}{r}\right)\right)\cos(\theta)\hat{\boldsymbol{r}} + \left(1 + 2\ln\left(\dfrac{r_0}{r}\right)\right)\sin(\theta)\hat{\boldsymbol{\theta}}\right] & r > r_0 \\ \dfrac{1}{4}E\zeta_0\left[-\cos(\theta)\hat{\boldsymbol{r}} + \sin(\theta)\hat{\boldsymbol{\theta}}\right] & r < r_0. \end{cases} \tag{5.21}$$

Similarly to one dimensional case, the maximal pressure of shear-thinning fluids, attained at $r = r_0$, can be either greater or less than the pressure of shear-thickening fluids depending on the value of $E\zeta_0$, where the transition occurs at $E\zeta_{0cr} \backsimeq 3.29$.

Figure 6 summarizes the effect of non-Newtonian behavior on the resulting pressure and velocity magnitude in the Hele-Shaw cell for the problem considered. Figures (6a) and (6b) present the pressure distribution in the first quadrant for shear-thinning and shear-thickening fluids, respectively. We note that, in order to provide clear comparison between the cases, we chose to present the result for $n = 0.5$ and $n = 1.5$, which for the previous 2D problem considered (see figure (5a)) bracketed the range of n values for which the error was less 10 %. However, since the current case has not analytical solution, the precise accuracy of the solution at these n values is unknown. The shear-thinning fluid (figure (6a)) is characterized by greater spacing in the isobars, compared to the shear-thickening fluid (figure (6b)). For further clarification, figures (6c) and (6d) present the same isobar and equi-velocity line, for three different values of the parameter n. This is also shown quantitatively in figures (6e) showing the distance from the origin over which the pressure decays to 10 % of its peak value, as a function of n. The solid part of the line corresponds to the range of n lying between 0.5 and 1.75, where the asymptotic approximation is assumed to be valid (according to the previous estimations) whereas the dashed region may involve significant errors. Figure (6f) presents a complementary view, indicating that the velocity magnitude decays slower for larger values of n.

To highlight the effect of different non-Newtonian behavior on the resulting flow field, we take advantage of the uniform flow field in the inner region and of the fact that by adding a constant value to zeta potential the resulting pressure remains unaffected.

Adding a bias value of $-\zeta_0/2$ to the zeta potential everywhere in the domain, leads to zero net flow in the spot for the Newtonian fluid and the resulting streamlines curve around the spot without penetrating it. Figure 7 presents the resulting streamlines for shear-thinning, Newtonian and shear-thickening fluids. The incoming black dashed streamlines, which represent shear-thinning behavior, are diverted towards the disk penetrating to it, due to negative net flow inside the spot. On the other hand, the incoming black dashed-dot streamlines, which represent shear-thinning behavior, are diverted away from the disk, owing to positive net flow inside the spot. This is consistent with (5.21) which predicts a positive velocity field, $(1/4)\,|\delta|\,E\zeta_0\hat{\boldsymbol{x}}$, for shear-thickening fluids and a negative velocity field, $-\,(1/4)\,|\delta|\,E\zeta_0\hat{\boldsymbol{x}}$, for shear-thinning fluids inside the spot.

6. Concluding remarks

In this work, we studied the flow and pressure fields of non-Newtonian fluids in a Hele-Shaw configuration, subjected to non-uniform EOF. Using a power-law constitutive model, and under a depletion regime, we derived a p-Poisson governing equation for the pressure, as well as its asymptotic approximation for weakly non-Newtonian fluids. Our analysis revealed that the asymptotic approximation may be applied for values of n between 0.5 and 1.75, while maintaining errors below 10 %.

We obtained that the maximal pressure due to shear-thickening fluids is greater than the pressure of shear-thinning fluids only for sufficiently large values of $E\zeta_0$. On the other hand, the velocity magnitude of shear-thickening fluids is greater compared to shear-thinning fluids for all values of $E\zeta_0$. The velocity field behavior depends on the boundary conditions, where for a Dirichlet-type boundary condition on the pressure (see § 4.1 and § 5.2), the resulting flow field depends on parameter n, while for a Neumann-type boundary condition it is independent of n, due to an implicitly prescribed flux (see § 5.1). We also showed that using common non-Newtonian fluids with wall depletion properties (e.g. polymer solutions) allows to increase the pressure resulting from non-uniform surface patterning by more than two orders of magnitude compared to Newtonian fluids.

In our study we used a simple power-law constitutive model that is valid only provided the shear rate $\dot{\gamma}$ (or $E\zeta_0$) is within specific bounds. While a more general Carreau constitutive model (Bird *et al.* 1987) can be applied to describe the entire range of shear rates, its use greatly increases the complexity of the analytical approach. In addition, we here neglected any viscoelastic effects. The use of power-law models holds well for polymer solutions such as CMC and PAA at low concentrations, for which viscoelastic effects are negligible compared to viscous (shear-thinning) effects (Lin & Ko 1995; Ghannam & Esmail 1997; Roberts & Barnes 2001; Kim *et al.* 2003). However, at higher polymer concentration viscoelastic effects are apparent, and more complex constitutive model such as PTT would be required.

The ability to predict the velocity and pressure fields of non-Newtonian fluids subjected to non-uniform EOF, together with the inherent pressure increase obtained for depletion-regime fluids, opens the door to enhancement of existing electro-kinetic devices such as electroosmotic pumps, may lead to better control of dispersion processes, and to the development of new applications involving fluid-structure interaction.

Acknowledgments

This project has received funding from the European Research Council (ERC) under the European Union's Horizon 2020 Research and Innovation Programme, grant agree-

ment No. 678734 (MetamorphChip). We gratefully acknowledge supported by the Israel Science Foundation (grant No. 818/13).

Appendix A. Dimensional governing equations

Here we summarize the main governing equations in a dimensional form. The corresponding dimensional in-plane and perpendicular velocities are

$$\tilde{\boldsymbol{u}}_{||} = \frac{n}{n+1}\frac{\tilde{h}^{1+\frac{1}{n}}}{\tilde{\mu}_{eff}^{\frac{1}{n}}}\left|\tilde{\boldsymbol{\nabla}}_{\parallel}\tilde{p}\right|^{\frac{1}{n}-1}\tilde{\boldsymbol{\nabla}}_{\parallel}\tilde{p}\left(\left|\frac{\tilde{z}}{\tilde{h}}\right|^{1+\frac{1}{n}}-1\right)-\frac{\tilde{\varepsilon}\tilde{\zeta}(\tilde{x},\tilde{y})\tilde{\boldsymbol{E}}_{\parallel}}{\tilde{\eta}_N}, \tag{A 1a}$$

$$\tilde{\boldsymbol{u}}_{\perp} = \frac{n}{n+1}\tilde{z}\left(1-\left|\frac{\tilde{z}}{\tilde{h}}\right|^{1+\frac{1}{n}}\right)\left[\tilde{\boldsymbol{\nabla}}_{\parallel}\left(-\frac{\tilde{\varepsilon}\tilde{\zeta}(\tilde{x},\tilde{y})}{\tilde{\eta}_N}\right)\cdot\tilde{\boldsymbol{E}}_{\parallel}\right]\hat{\boldsymbol{z}}, \tag{A 1b}$$

respectively. With the definition for depth-averaged velocity, $\langle\tilde{\boldsymbol{u}}_{\parallel}\rangle = \left(1/\tilde{h}\right)\int_{\tilde{z}=0}^{\tilde{z}=\tilde{h}}\tilde{\boldsymbol{u}}_{||}d\tilde{z}$, and using (A 1$a$) yields

$$\langle\tilde{\boldsymbol{u}}_{\parallel}\rangle = -\left(\frac{n}{2n+1}\right)\frac{\tilde{h}^{1+\frac{1}{n}}}{\tilde{\mu}_{eff}^{\frac{1}{n}}}\left|\tilde{\boldsymbol{\nabla}}_{\parallel}\tilde{p}\right|^{\frac{1}{n}-1}\tilde{\boldsymbol{\nabla}}_{\parallel}\tilde{p}-\frac{\tilde{\varepsilon}\tilde{\zeta}(\tilde{x},\tilde{y})\tilde{\boldsymbol{E}}_{\parallel}}{\tilde{\eta}_N}, \tag{A 2}$$

while applying two dimensional divergence to (A 2) results in dimensional governing p-Poisson equation for the pressure

$$\tilde{\boldsymbol{\nabla}}_{\parallel}\cdot\left(\left|\tilde{\boldsymbol{\nabla}}_{\parallel}\tilde{p}\right|^{\frac{1}{n}-1}\tilde{\boldsymbol{\nabla}}_{\parallel}\tilde{p}\right) = -\left(\frac{2n+1}{n}\right)\frac{\tilde{\mu}_{eff}^{\frac{1}{n}}}{\tilde{\eta}_N}\frac{\tilde{\varepsilon}}{\tilde{h}^{1+\frac{1}{n}}}\tilde{\boldsymbol{E}}_{\parallel}\cdot\tilde{\boldsymbol{\nabla}}_{\parallel}\tilde{\zeta}. \tag{A 3}$$

We note that $\tilde{\mu}_{eff}$ here is measured in units of $\mathrm{Pa\,s^n}$ and depends on the value of n. For weakly non-Newtonian behavior we define $n = 1-\delta$, and the dimensional leading and first orders equations for the pressure (3.14) and (3.14) read, respectively

$$O(1): \quad \tilde{\nabla}_{\parallel}^2\tilde{p}^{(0)} = \left(-\frac{\tilde{p}^*}{\tilde{E}^*\tilde{\zeta}^*\tilde{l}}\right)\tilde{\boldsymbol{E}}_{\parallel}\cdot\tilde{\boldsymbol{\nabla}}_{\parallel}\tilde{\zeta}, \tag{A 4a}$$

$$O(\delta): \quad \tilde{\nabla}_{\parallel}^2\tilde{p}^{(1)} = -\tilde{\boldsymbol{\nabla}}_{\parallel}\cdot\left(\ln\left|\frac{\tilde{l}}{\tilde{p}^*}\tilde{\boldsymbol{\nabla}}_{\parallel}p^{(0)}\right|\tilde{\boldsymbol{\nabla}}_{\parallel}p^{(0)}\right), \tag{A 4b}$$

where $\tilde{p}^*$ is a characteristic pressure

$$\tilde{p}^* = \left(\frac{2n+1}{n}\right)^n\frac{\tilde{\mu}_{eff}}{\epsilon^{n+1}\tilde{l}^n}\left(\frac{\tilde{\varepsilon}\left|\tilde{\zeta}^*\right|\tilde{E}^*}{\tilde{\eta}_N}\right)^n. \tag{A 5}$$

REFERENCES

Abramowitz, M. & Stegun, I. A. 1964 *Handbook of Mathematical Functions*. Dover.

Afonso, A. M., Alves, M. A. & Pinho, F. T. 2009 Analytical solution of mixed electro-osmotic/pressure driven flows of viscoelastic fluids in microchannels. *J. Non-Newtonian Fluid Mech.* **159** (1), 50–63.

Afonso, A. M., Alves, M. A. & Pinho, F. T. 2011 Electro-osmotic flow of viscoelastic fluids in microchannels under asymmetric zeta potentials. *J. Eng. Math.* **71** (1), 15–30.

Afonso, A. M., Alves, M. A. & Pinho, F. T. 2013 Analytical solution of two-fluid electro-osmotic flows of viscoelastic fluids. *J. Colloid Interface Sci.* **395**, 277–286.

Ajdari, A. 1995 Electro-osmosis on inhomogeneously charged surfaces. *Phys. Rev. Lett.* **75** (4), 755.

Ajdari, A. 1996 Generation of transverse fluid currents and forces by an electric field: Electro-osmosis on charge-modulated and undulated surfaces. *Phys. Rev. E* **53** (5), 4996.

Ajdari, A. 2001 Transverse electrokinetic and microfluidic effects in micropatterned channels: Lubrication analysis for slab geometries. *Phys. Rev. E* **65** (1), 016301.

Anderson, J. L. & Idol, W. K. 1985 Electroosmosis through pores with nonuniformly charged walls. *Chem. Engng. Commun.* **38** (3-6), 93–106.

Aronsson, G. & Janfalk, U. 1992 On hele-shaw flow of power-law fluids. *Eur. J. Appl. Maths* **3** (04), 343–366.

Babaie, A., Sadeghi, A. & Saidi, M. H. 2011 Combined electroosmotically and pressure driven flow of power-law fluids in a slit microchannel. *J. Non-Newtonian Fluid Mech.* **166** (14), 792–798.

Barnes, H. A. 1995 A review of the slip (wall depletion) of polymer solutions, emulsions and particle suspensions in viscometers: its cause, character, and cure. *J. Non-Newtonian Fluid Mech.* **56** (3), 221–251.

Berli, C. L. A. 2010 Output pressure and efficiency of electrokinetic pumping of non-Newtonian fluids. *Microfluid Nanofluid* **8** (2), 197–207.

Berli, C. L. A. & Olivares, M. L. 2008 Electrokinetic flow of non-Newtonian fluids in microchannels. *J. Colloid Interface Sci.* **320** (2), 582–589.

Bird, R. B., Armstrong, R. C. & Hassager, O. 1987 *Dynamics of polymeric liquids. Volume 1: Fluid Mechanics*. 2nd ed. John Wiley and Sons.

Boyko, E., Rubin, S., Gat, A. D. & Bercovici, M. 2015 Flow patterning in Hele-Shaw configurations using non-uniform electro-osmotic slip. *Phys. Fluids* **27** (10), 102001.

Das, S. & Chakraborty, S. 2006 Analytical solutions for velocity, temperature and concentration distribution in electroosmotic microchannel flows of a non-Newtonian bio-fluid. *Anal. Chim. Acta* **559** (1), 15–24.

Derjaguin, B. V., Dukhin, S. S. & Korotkova, A. A. 1961 Diffusiophoresis in electrolyte solutions and its role in the mechanism of film formation from rubber latexes by the method of ionic deposition. *Kolloidn. Zh.* **23** (1), 53.

Derjaguin, B. V., Dukhin, S. S. & Korotkova, A. A. 1993 Diffusiophoresis in electrolyte solutions and its role in the mechanism of the formation of films from caoutchouc latexes by the ionic deposition method. *Prog. Surf. Sci.* **43** (1), 153–158.

Dhinakaran, S., Afonso, A. M., Alves, M. A. & Pinho, F. T. 2010 Steady viscoelastic fluid flow between parallel plates under electro-osmotic forces: Phan-Thien-Tanner model. *J. Colloid Interface Sci.* **344** (2), 513–520.

Erickson, D. & Li, D. 2002 Influence of surface heterogeneity on electrokinetically driven microfluidic mixing. *Langmuir* **18** (5), 1883–1892.

Erickson, D. & Li, D. 2003 Three-dimensional structure of electroosmotic flow over heterogeneous surfaces. *J. Phys. Chem.* **107** (44), 12212–12220.

Ghannam, M. T. & Esmail, M. N. 1997 Rheological properties of carboxymethyl cellulose. *J. Appl. Polymer Sci.* **64** (2), 289–301.

Ghosh, U. & Chakraborty, S. 2015 Electroosmosis of viscoelastic fluids over charge modulated surfaces in narrow confinements. *Phys. Fluids* **27** (6), 062004.

Hunter, R. J. 2000 *Foundations of colloid science*. Oxford University Press.

Irgens, F. 2014 *Rheology and Non-Newtonian Fluids*. Springer.

Khair, A. S. & Squires, T. M. 2008*a* Fundamental aspects of concentration polarization arising from nonuniform electrokinetic transport. *Phys. Fluids* **20** (8), 087102.

Khair, A. S. & Squires, T. M. 2008*b* Surprising consequences of ion conservation in electro-osmosis over a surface charge discontinuity. *J. Fluid Mech.* **615**, 323–334.

Kim, J.-Y., Song, J.-Y., Lee, E.-J. & Park, S.-K. 2003 Rheological properties and microstructures of carbopol gel network system. *Colloid Polym. Sci.* **281** (7), 614–623.

Lin, C.-X. & Ko, S.-Y. 1995 Effects of temperature and concentration on the steady shear properties of aqueous solutions of carbopol and cmc. *Int. Commun. Heat Mass Transfer* **22** (2), 157–166.

Lyklema, J. 1995 *Fundamentals of Interface and Colloid Science. Volume II: Solid-Liquid Interfaces*. Academic.

Ng, C. & Qi, C. 2014 Electroosmotic flow of a power-law fluid in a non-uniform microchannel. *J. of Non-Newtonian Fluid Mech.* **208**, 118–125.

Olivares, M. L., Vera-Candioti, L. & Berli, C. L. A. 2009 The EOF of polymer solutions. *Electrophoresis* **30** (5), 921–928.

Paul, P. H. 2008 Electrokinetic device employing a non-Newtonian liquid. US Patent, US7429317.

Prieve, D. C., Anderson, J. L., Ebel, J. P. & Lowell, M. E. 1984 Motion of a particle generated by chemical gradients. Part 2. Electrolytes. *J. Fluid Mech.* **148**, 247–269.

Qi, C. & Ng, C. 2015 Electroosmotic flow of a power-law fluid in a slit microchannel with gradually varying channel height and wall potential. *Eur. J. of Mech.-B/Fluids* **52**, 160–168.

Qian, S. & Bau, H. H. 2002 A chaotic electroosmotic stirrer. *Anal.Chem.* **74** (15), 3616–3625.

Roberts, G. P. & Barnes, H. A. 2001 New measurements of the flow-curves for carbopol dispersions without slip artefacts. *Rheol. Acta* **40** (5), 499–503.

Rubin, S., Tulchinky, A., Gat, A. & Bercovici, M. 2016 Elastic deformations driven by non-uniform lubrication flows. *under consideration in J. Fluid Mech.* .

Sousa, J. J., Afonso, A. M., Pinho, F. T. & Alves, M. A. 2011 Effect of the skimming layer on electroosmotic-Poiseuille flows of viscoelastic fluids. *Microfluid Nanofluid* **10** (1), 107–122.

Stroock, A. D., Weck, M., Chiu, D. T., Huck, W. T. S., Kenis, P. J. A., Ismagilov, R. F. & Whitesides, G. M. 2000 Patterning electro-osmotic flow with patterned surface charge. *Phys. Rev. Lett.* **84** (15), 3314.

Tang, G. H., Li, X. F., He, Y. L. & Tao, W. Q. 2009 Electroosmotic flow of non-Newtonian fluid in microchannels. *J. Non-Newtonian Fluid Mech.* **157** (1), 133–137.

Vakili, M. A., Sadeghi, A., S., Mohammad H. & Mozafari, A. A. 2012 Electrokinetically driven fluidic transport of power-law fluids in rectangular microchannels. *Colloids Surf., A* **414**, 440–456.

Vasu, N. & De, S. 2010 Electroosmotic flow of power-law fluids at high zeta potentials. *Colloids Surf., A* **368** (1), 44–52.

Zhang, J., He, G. & Liu, F. 2006 Electroosmotic flow and mixing in heterogeneous microchannels. *Phys. Rev. E* **73** (5), 056305.

Zhao, C. & Yang, C. 2010 Nonlinear Smoluchowski velocity for electroosmosis of power-law fluids over a surface with arbitrary zeta potentials. *Electrophoresis* **31** (5), 973–979.

Zhao, C. & Yang, C. 2011 An exact solution for electroosmosis of non-Newtonian fluids in microchannels. *J. Non-Newtonian Fluid Mech.* **166** (17), 1076–1079.

Zhao, C. & Yang, C. 2013*a* Electrokinetics of non-Newtonian fluids: a review. *Adv. Colloid and Interface Sci.* **201**, 94–108.

Zhao, C. & Yang, C. 2013*b* Electroosmotic flows of non-Newtonian power-law fluids in a cylindrical microchannel. *Electrophoresis* **34** (5), 662–667.

Zhao, C., Zholkovskij, E., Masliyah, J. H. & Yang, C. 2008 Analysis of electroosmotic flow of power-law fluids in a slit microchannel. *J. Colloid Interface Sci.* **326** (2), 503–510.